

LED Retrofit Kit-E39



Features:

- Ideal retrofit solution for traditional lighting source while maintain the original historical or unique lighting fixtures.
- Wide range of power and lumen output selection, easily replace HID from 150W-250W.
- The LED retrofit kit includes the LED light source, LED driver.
- The field adjustable mounting socket or bracket provides maximum flexibility and quick conversion of HID light.
- Different level of CCT to accommodate environmental lighting effect.







Application

Area Light, Historic Districts Light, Parks and Open Centers, Campuses, Decorative Post Tops.

Technical Specification

Item No.	KLYRK060	KLYRK080	KLYRK100	KLYRK120
Nominal Power (W)	60	80	100	120
Input Voltage (V)	AC100-277V 50/60Hz			
Luminous Efficiency (lm/W)	>105			
Lumen Output (lm)	6000	8500	10500	12500
LED Light Source	CREE			
CCT (K)	3000/3500/4000/4500/5000/5700			
CRI	120			
Power Factor	0.95			
Driver	Meanwell			
Beam Angle	120			
Socket Type	E26/E39	E26/E39	E26/E39	E26/E39
Body Material	Aluminium			
Lifetime(Hrs)	50000			
Dimension(mm)	283*248*125			
Warranty	5 Years			
Certification	UL/CUL			
Working Temperature	-30°C ~ 50°C			

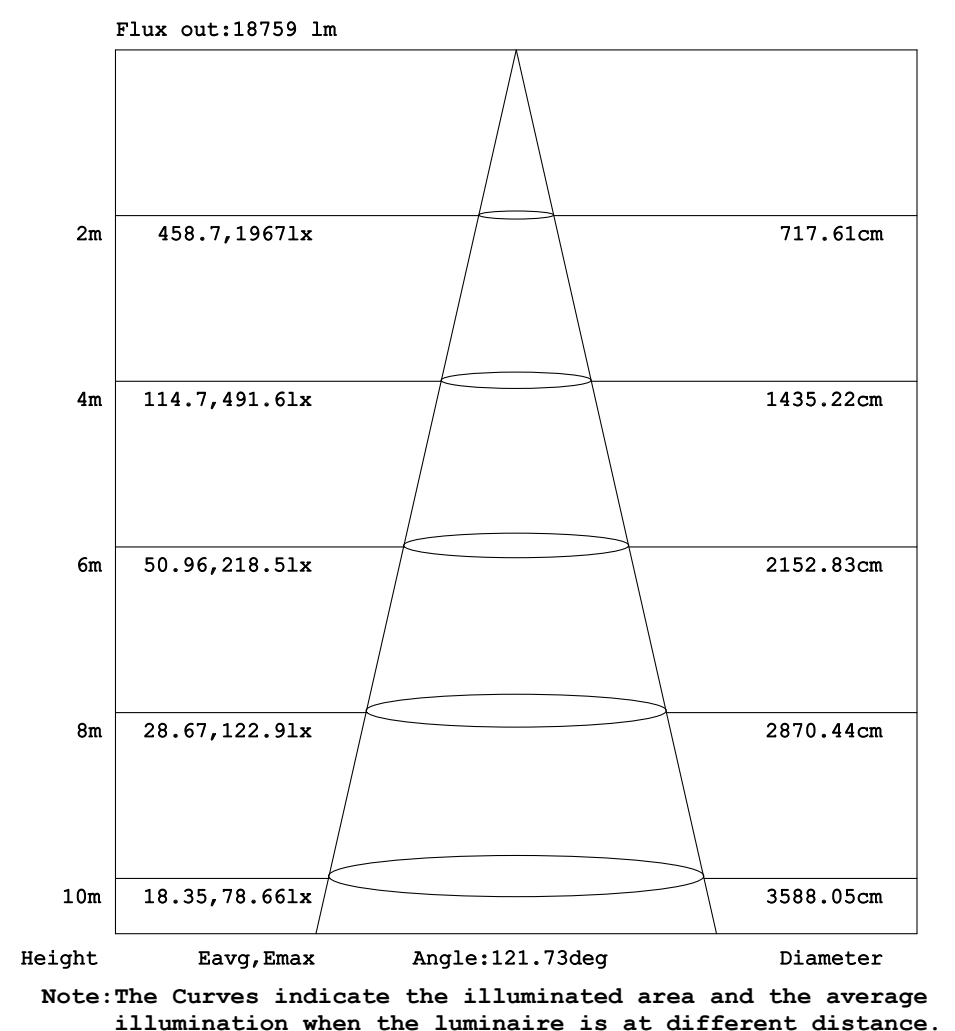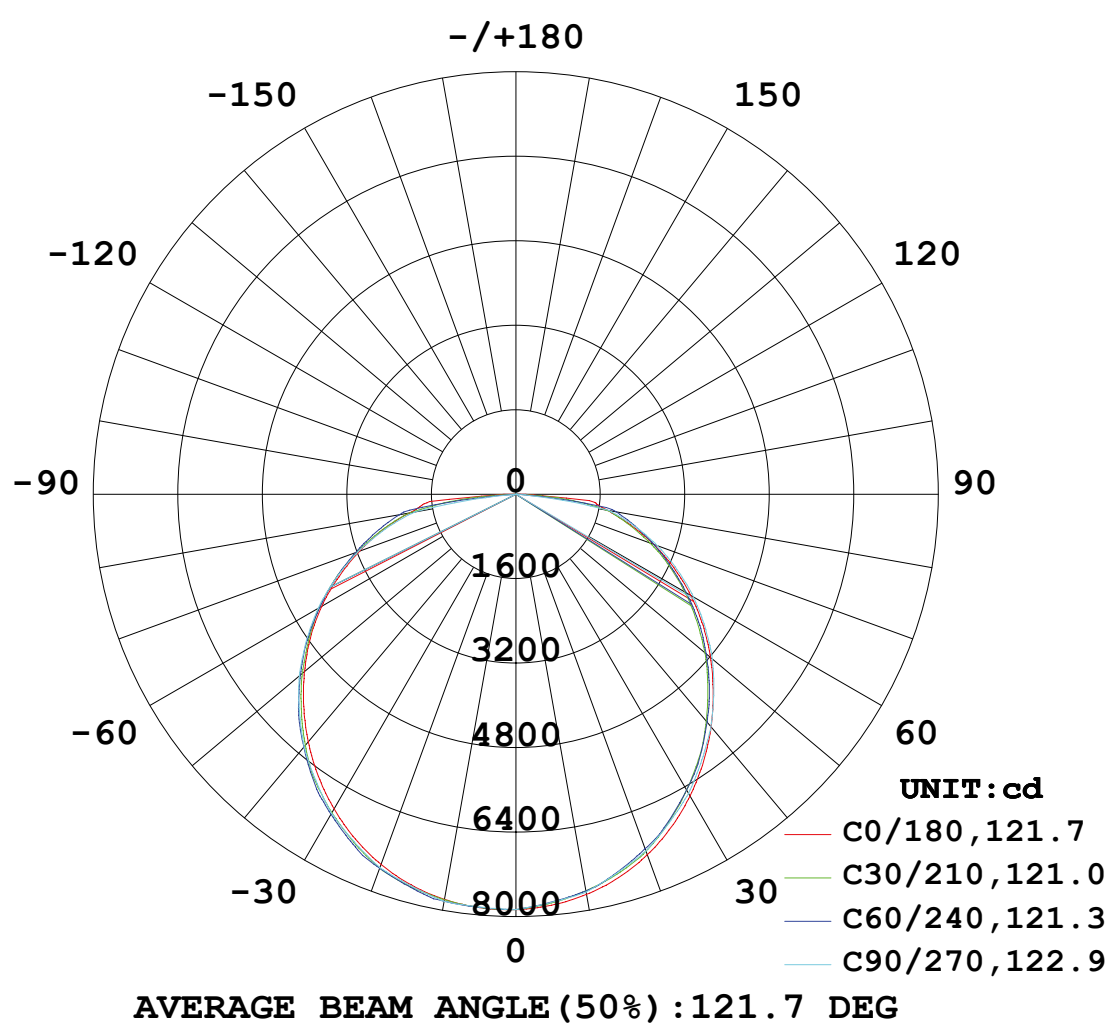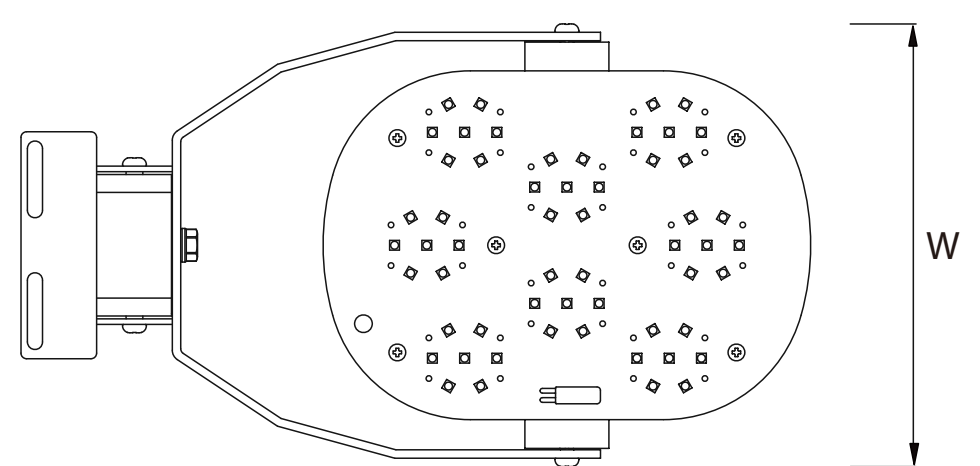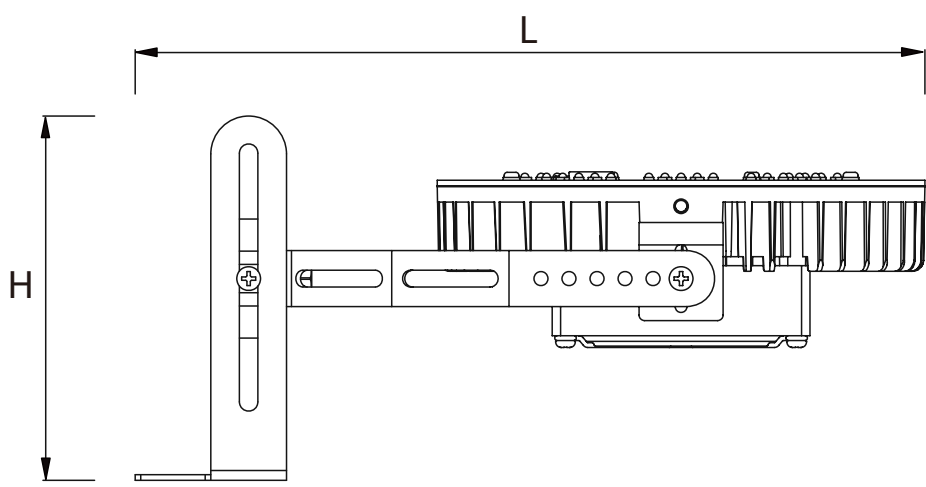

240W